### IEC Appliance Inlet C14 with Fuseholder 1-pole, wired

Screw-on version from front or rear side, snap-in version front side

- Appliance Inlet Protection class I , Fuseholder for fuse-links 5 x 20 mm

- Meets the requirements of IEC 60335-1 for appliances in unattended

use. This includes the enhanced requirements of glow wire tests acc.





Screw-on mounting

Snap-in version



Description

1-pole

- Panel mount :

- V-Lock notch standard

- Solder / Quick Connect

. . . . .

to IEC 60695-2-11 or -12 &-13.

## See below: Approvals and Compliances

## Characteristics

- All single elements are already wired
- Plug removal necessary for fuse-link replacement
- Suitable for use in equipment according to IEC/UL 62368-1

#### Other versions on request

- Types for rivet mounting available upon request

### References

Alternative: version with line filter 5200 Alternative: Fuseholder 2-pole 6220

### Weblinks

pdf data sheet, html datasheet, General Product Information, Approvals, Distributor-Stock-Check, Accessories, Detailed request for product

Technical Data			
Ratings IEC	10A / 250VAC; 50Hz	Appliance inlet/-outlet	C14 acc. to IEC 60320-1,
Ratings UL/CSA	10A / 250VAC; 60Hz		UL 60320-1, CSA C22.2 no. 60320-1
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE		(for cold conditions) pin-temperature 70 °C, 10A, Protection Class I
	(1 min/50 Hz)	Fuseholder	1-pole, Shocksafe category PC2 acc. to
Allowable Operation Tempe- rature	-25 °C to 70 °C		IEC 60127-6, UL 498, for fuse-links 5 x 20mm
IP-Protection	front side IP40 acc. to IEC 60529	Rated Power Acceptance @	5 x 20: 2 W (1 pole)
Protection against electric shock	Suitable for appliances with protection class I acc. to IEC 61140	Ta 23 °C Power Acceptance @ Ta >	Admissible power acceptance at higher
Terminal	Solder / Quick Connect, tin-plated	23°C	ambient temperature see derating cur-
Panel Thickness S	Screw: max 6mm Mounting screw torque max 0.5Nm Snap-in: 1/1.5/2/2.5/3 mm		Ves
Material: Housing	Thermoplastic, black, UL 94V-0		

### **Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

## Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: 6200

Approval Logo	Certificates	Certification Body	Description
10	VDE Approvals	VDE	Certificate Number: 40036853
	UL Approvals	UL	UR File Number: E93617
(m)	CCC Approvals	CCC	CCC Certificate Number: 2018180204006593

## Product standards

Product standards that are referenced

OrganizationDesignStandardDescriptionICCDesigned according toIEC 60320-1Appliance couplers for household and similar general purposesICCDesigned according toIEC 60127-6Miniature fuses. Part 6. Fuse-holders for miniature fuse-linksICCDesigned according toIEC 61058-1Switches for appliances. Part 1. General requirementsICDDesigned according toUL 60320-1Standard for Attachment Plugs and ReceptaclesICCDesigned according toCSA C22. 2 no. 60320-1General Use Receptacles, Attachment Plugs, and Similar Wiring Devices				
Image: Construction       Designed according to       IEC 60127-6       Miniature fuses. Part 6. Fuse-holders for miniature fuse-links         Image: Construction       Designed according to       IEC 61058-1       Switches for appliances. Part 1. General requirements         Image: Construction       Designed according to       UL 60320-1       Standard for Attachment Plugs and Receptacles	Organization	Design	Standard	Description
Designed according to       IEC 61058-1       Switches for appliances. Part 1. General requirements         Designed according to       UL 60320-1       Standard for Attachment Plugs and Receptacles	IEC	Designed according to	IEC 60320-1	Appliance couplers for household and similar general purposes
Designed according to     UL 60320-1     Standard for Attachment Plugs and Receptacles	IEC	Designed according to	IEC 60127-6	Miniature fuses. Part 6. Fuse-holders for miniature fuse-links
	IEC	Designed according to	IEC 61058-1	Switches for appliances. Part 1. General requirements
Designed according to CSA C22.2 no. 60320-1 General Use Receptacles, Attachment Plugs, and Similar Wiring Devices	(h)	Designed according to	UL 60320-1	Standard for Attachment Plugs and Receptacles
	GE Group	Designed according to	CSA C22.2 no. 60320-1	General Use Receptacles, Attachment Plugs, and Similar Wiring Devices

## **Application standards**

Application standards where the product can be used

	•		
Organization	Design	Standard	Description
IEC.	Suitable for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements
IEC	Suitable for applications acc.	IEC 60335-1	Safety of electrical appliances for household and similar purposes. Meets the requirements for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC 60695-2-11 or -12 & -13.


### Compliances

The product complies with following Guide Lines

IdentificationDetailsInitiatorDescriptionC €CE declaration of conformitySCHURTER AGThe CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.LKUKCA declaration of conformitySCHURTER AGThe UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation 765/2008.LKRoHSSCHURTER AGDirective RoHS 2011/65/EU, Amendment (EU) 2015/863Image: SCHURTER AGChina RoHSSCHURTER AGDirective RoHS 2011/65/EU, Amendment (EU) 2015/863Image: SCHURTER AGChina RoHSSCHURTER AGOn 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.Image: SCHURTER AGSCHURTER AGOn 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.Image: SCHURTER AGSCHURTER AGV-Lock system are based on a matching plug-dose combination. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.Image: SCHURTER AGSCHURTER AGMeets the requirements of IEC 60335-1 for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC 60695-2-11 or -12 &-13.				
CCrequirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.UKCA declaration of conformitySCHURTER AGThe UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.Image: RoHSSCHURTER AGDirective RoHS 2011/65/EU, Amendment (EU) 2015/863Image: RoHSSCHURTER AGThe law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.Image: REACHREACHSCHURTER AGOn 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.Image: V-LockSCHURTER AGV-Lock system are based on a matching plug-dose combination. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.Image: Vietual conductive regulation glugo wire testSCHURTER AGMeets the requirements of IEC 60335-1 for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC	Identification	Details	Initiator	Description
Top       RoHS       SCHURTER AG       Directive RoHS 2011/65/EU, Amendment (EU) 2015/863         Image: China RoHS       SCHURTER AG       Directive RoHS 2011/65/EU, Amendment (EU) 2015/863         Image: China RoHS       SCHURTER AG       The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.         Image: REACH       REACH       SCHURTER AG       On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.         Image: V-Lock       SCHURTER AG       V-Lock system are based on a matching plug-dose combination. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.         Image: China Role Color wire test       SCHURTER AG       Meets the requirements of IEC 60335-1 for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC	CE	CE declaration of conformity	SCHURTER AG	requirements laid down in the harmonisation of Community legislation on
China RoHS       SCHURTER AG       The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.         REACH       SCHURTER AG       On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.         V-Lock       SCHURTER AG       V-Lock system are based on a matching plug-dose combination. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.         Image: Display in the Paper Glow wire test       SCHURTER AG       Meets the requirements of IEC 60335-1 for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC	UK CA	UKCA declaration of conformity	SCHURTER AG	requirements laid down in the British Amendment of Regulation (EC)
White Paper Glow wire test       SCHURTER AG       001 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.         White Paper Glow wire test       SCHURTER AG       V-Lock system are based on a matching plug-dose combination. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.         Image: White Paper Glow wire test       SCHURTER AG       Meets the requirements of IEC 60335-1 for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC	ROHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
V-Lock       SCHURTER AG       Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.         V-Lock system are based on a matching plug-dose combination. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.         Image: the paper Glow wire test       SCHURTER AG         Velock system are based on a matching plug-dose combination. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.         Image: the paper Glow wire test       SCHURTER AG         Meets the requirements of IEC 60335-1 for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC	©	China RoHS	SCHURTER AG	
V-LOCK       connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.         Image: White Paper Glow wire test       SCHURTER AG         Meets the requirements of IEC 60335-1 for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC	REACH	REACH	SCHURTER AG	Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as
This includes the enhanced requirements of glow wire tests acc. to IEC	V-Lock		SCHURTER AG	connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of
	00	White Paper Glow wire test	SCHURTER AG	This includes the enhanced requirements of glow wire tests acc. to IEC

# Dimensions [mm]


Screw-on mounting

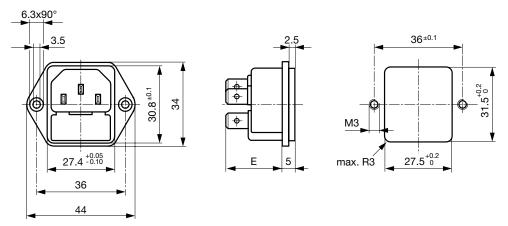

E: Solder terminals 20.5 mm


E: Quick connect terminals 23.5 mm

Snap-in mounting

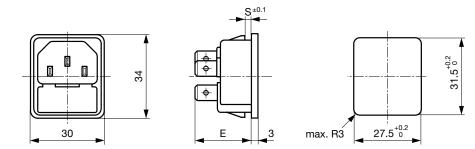


E: solder terminals 22.5 mm E: quick-connect terminals 25.5 mm S: 1.0/1.5/2.0/2.5/3.0 mm

## Diagrams



## Derating Curves



## Variants

Protection Class	Panel mounting	Panel Thickness s [mm]	Fuseholder	Terminal	Internally wired	Order Number
I	Snap-in	1	1-pole	Quick connect terminals 4.8 x 0.8 mm	•	6200.4210
I	Snap-in	1.5	1-pole	Quick connect terminals 4.8 x 0.8 mm	•	6200.4215
I	Snap-in	2	1-pole	Quick connect terminals 4.8 x 0.8 mm	•	6200.4220
I	Snap-in	2.5	1-pole	Quick connect terminals 4.8 x 0.8 mm	•	6200.4225
I	Snap-in	3	1-pole	Quick connect terminals 4.8 x 0.8 mm	•	6200.4230
I	Snap-in	1	1-pole	Quick connect terminals 6.3 x 0.8 mm	٠	6200.4310
I	Snap-in	1.5	1-pole	Quick connect terminals 6.3 x 0.8 mm	•	6200.4315
I	Snap-in	2	1-pole	Quick connect terminals 6.3 x 0.8 mm	٠	6200.4320
I	Snap-in	2.5	1-pole	Quick connect terminals 6.3 x 0.8 mm	•	6200.4325
I	Snap-in	3	1-pole	Quick connect terminals 6.3 x 0.8 mm	٠	6200.4330
I.	Snap-in	1	1-pole	Solder terminals 3.8 x 0.8 mm	•	6200.4110
I	Snap-in	1.5	1-pole	Solder terminals 3.8 x 0.8 mm	٠	6200.4115
I	Snap-in	2	1-pole	Solder terminals 3.8 x 0.8 mm	•	6200.4120
I	Snap-in	2.5	1-pole	Solder terminals 3.8 x 0.8 mm	•	6200.4125
I	Snap-in	3	1-pole	Solder terminals 3.8 x 0.8 mm	•	6200.4130
I	Screw	-	1-pole	Quick connect terminals 4.8 x 0.8 mm	٠	6200.2200
I	Screw	-	1-pole	Quick connect terminals 6.3 x 0.8 mm	•	6200.2300
I	Screw	-	1-pole	Solder terminals 3.8 x 0.8 mm	•	6200.2100

Availability for all products can be searched real-time: https://www.schurter.com/en/info-center/support-tools/stock-check-distributors

Packaging unit

50 Pcs

### Accessories

Description



RC320 Rear Cover for Power Entry Module



### Cord\_retaining\_kits Cord retaining strain relief

 Flat head, A
 4700.0001

 Countersunk, B
 4700.0002

## Mating Outlets/Connectors

Category / Description



#### Appliance Outlet Overview complete

4787, Mounting: Screw-on mounting, Appliance Outlet: IEC Solder terminals, 10 A, Suitable for appliances with pro- tection class I	4787
IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder, PCB or Quick-connect Terminal	5091

### Connector Overview complete

and the second second

4782 Mounting: Power Cord, 3 x 1 mm <sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C13	4782
4785 Mounting: Power Cord, 3 x 1 mm <sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C13	4785
4300-06 Mounting: Power Cord, 3 x 1 mm <sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C13	4300-06
4781 Mounting: Power Cord, Cable, Connector: IEC C15	4781
4784 Mounting: Power Cord, 3 x 1 mm <sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C15	4784

### Mating Outlets/Connectors shuttered



#### **Connector Overview complete**

4783 Mounting: Power Cord, 3 x 1 mm<sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C13

4783